


MILCABLE



Calibrations "K", "J", "E", "T"

Random lengths, Simplex (2-wire), Duplex (4-wire), 98% purity MgO="M"

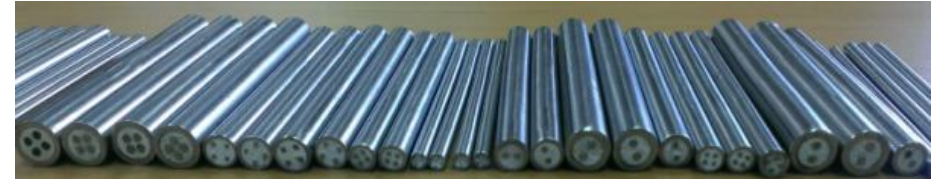

| Meter O.D. | A(SUS304) | | Φ27.2xΦ22.2 x7000mm B(NCF600) (Standard) | | C(SUS316) | | D(SUS310S) | | E(SUS321) | | F(SUS347) | | JIS class I Special (Additional Cost) | N Type (Additional Cost) | | m/Coil (+/-15%) | |
|---------------|---------------------|--------------------|---|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|--|-----------------------------|--------------------|-----------------|-------|
| | Simplex (2-wire) | Duplex (4-wire) | Simplex (2-wire) | Duplex (4-wire) | Simplex (2-wire) | Duplex (4-wire) | Simplex (2-wire) | Duplex (4-wire) | Simplex (2-wire) | Duplex (4-wire) | Simplex (2-wire) | Duplex (4-wire) | | Simplex (2-wire) | Duplex (4-wire) | 27.2B | other |
| 12.7 mm | | | | | | | | | | | | | | | | 22 | 20 |
| 9.5 mm | | | | | | | | | | | | | | | | 40 | 36 |
| 8.0 mm | | | | | | | | | | | | | | | | 57 | 51 |
| 6.4 mm | | | | | | | | | | | | | | | | 89 | 80 |
| 6.0 mm | | | | | | | | | | | | | | | | 102 | 91 |
| 4.8 mm | | | | | | | | | | | | | | | | 159 | 166 |
| 4.5 mm | | | | | | | | | | | | | | | | 181 | 162 |
| 3.2 mm | | | | | | | | | | | | | | | | 358 | 166 |
| 3.0 mm | | | | | | | | | | | | | | | | 408 | 189 |
| 2.3 mm | | | | | | | | | | | | | | | | | 321 |
| 2.0 mm | | | | | | | | | | | | | | | | | 425 |
| 1.6 mm | | | | | | | | | | | | | | | | | 166 |
| 1.5 mm | | | | | | | | | | | | | | | | | 189 |
| 1.0 mm | | | | | | | | | | | | | | | | | 425 |
| 0.5 mm | | | | | | | | | | | | | | | | | 260 |

MI-20170101-OKAZAKI

